

# Screwdrivers




# Speed and precision!

- Different variants like shut-off and slip-clutch for precision clamping. Impact drive and direct drive for a wide variety of applications
- Well balanced and ergonomic
- Soft-start trigger for smooth operation
- 360 degree adjustable air exhaust
- Silent



## Selection guide

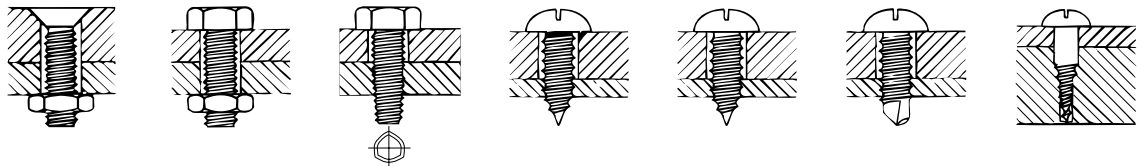

	Machine screw 4.8	Machine screw 8.8	Thread forming screw-M	Thread forming screw-ST	Thread forming screw-ST plastic	Self drilling screw-S	Wood screw
Impact clutch	◇	◇	◇			◇	◇
Direct drive	◇	◇	◇	◇		◇	◇
Slip clutch	◇	◇	◇	◇	◇	◇	◇
Shut-off clutch	◇	◇	◇	◇		◇	

◇ Recommended  
◇ Usable

# Pneumatic screwdrivers



S2305

## Direct Drive Screwdrivers

**Direct Drive** Screwdrivers are suitable for self-drilling and wood screws. The tools are well balanced and quiet. A soft-start trigger ensures smooth operation and the air exhaust is adjustable through 360 degrees.

Model	Torque range Nm	Free Speed r/min	Drive	Handle	Weight kg	Length mm	Air Cons l/s	Air thread	Quick chuck	Push	Push and trigger	Trigger	Ordering No.
S2305	0-12	750	Direct drive	Pistol	.9	198	5.6	1/4"	1/4"	-	-	•	8431 0257 28
S2326	0-4.5	2400	Direct drive	Pistol	.8	178	5.6	1/4"	1/4"	-	-	•	8431 0257 36



S2445-L

S2475-P

## Shut-off Screwdrivers

**Shut-off** Screwdrivers offer impressively high torque accuracy. Our fast shut-off models deliver smooth performance and high quality tightening.

Model	Torque range Nm	Free Speed r/min	Drive	Handle	Weight kg	Length mm	Air Cons l/s	Air thread	Quick chuck	Push	Push and trigger	Trigger	Ordering No.
S2443-P	0.4-4.3	1100	Shut off	Pistol	.8	182	6.5	1/8"	1/4"	•	-	-	8431 0257 43
S2475-P	1-7.5	1000	Shut off	Pistol	1.1	235	10	1/4"	1/4"	-	-	•	8431 0257 75
S2416-L	0.5-1.6	1500	Shut off	Straight	.9	230	6.0	1/4"	1/4"	-	-	•	8431 0257 82
S2445-L	0.5-4.5	1700	Shut off	Straight	.8	232	13.7	1/4"	1/4"	•	-	-	8431 0257 45
S2465-L	0.8-6.5	1000	Shut off	Straight	.8	232	14.6	1/4"	1/4"	•	-	-	8431 02 57 65




S2370-C

S2306-CE

**Slip-Clutch** Screwdrivers provide an implied pulsating force, or slip, once you reach the desired torque.

Model	Torque range Nm	Free Speed r/min	Drive	Handle	Weight kg	Length mm	Air Cons l/s	Air thread	Quick chuck	Push	Push and trigger	Trigger	Ordering No.
S2306-CE	1-6	1700	Slip clutch	Pistol	.9	190	10	1/4"	1/4"	-	-	•	8431 0257 06
S2308-C	2.5-11	950	Slip clutch	Pistol	1.1	225	8.4	1/4"	1/4"	-	•	-	8431 0257 20
S2355-CE	1.5-5.5	1700	Slip clutch	Straight	.8	207	13.1	1/4"	1/4"	-	-	•	8431 0257 55
S2370-C	2-6	1300	Slip clutch	Straight	.9	250	4.0	1/4"	1/4"	-	•	-	8431 0257 70

# Electric Screwdrivers

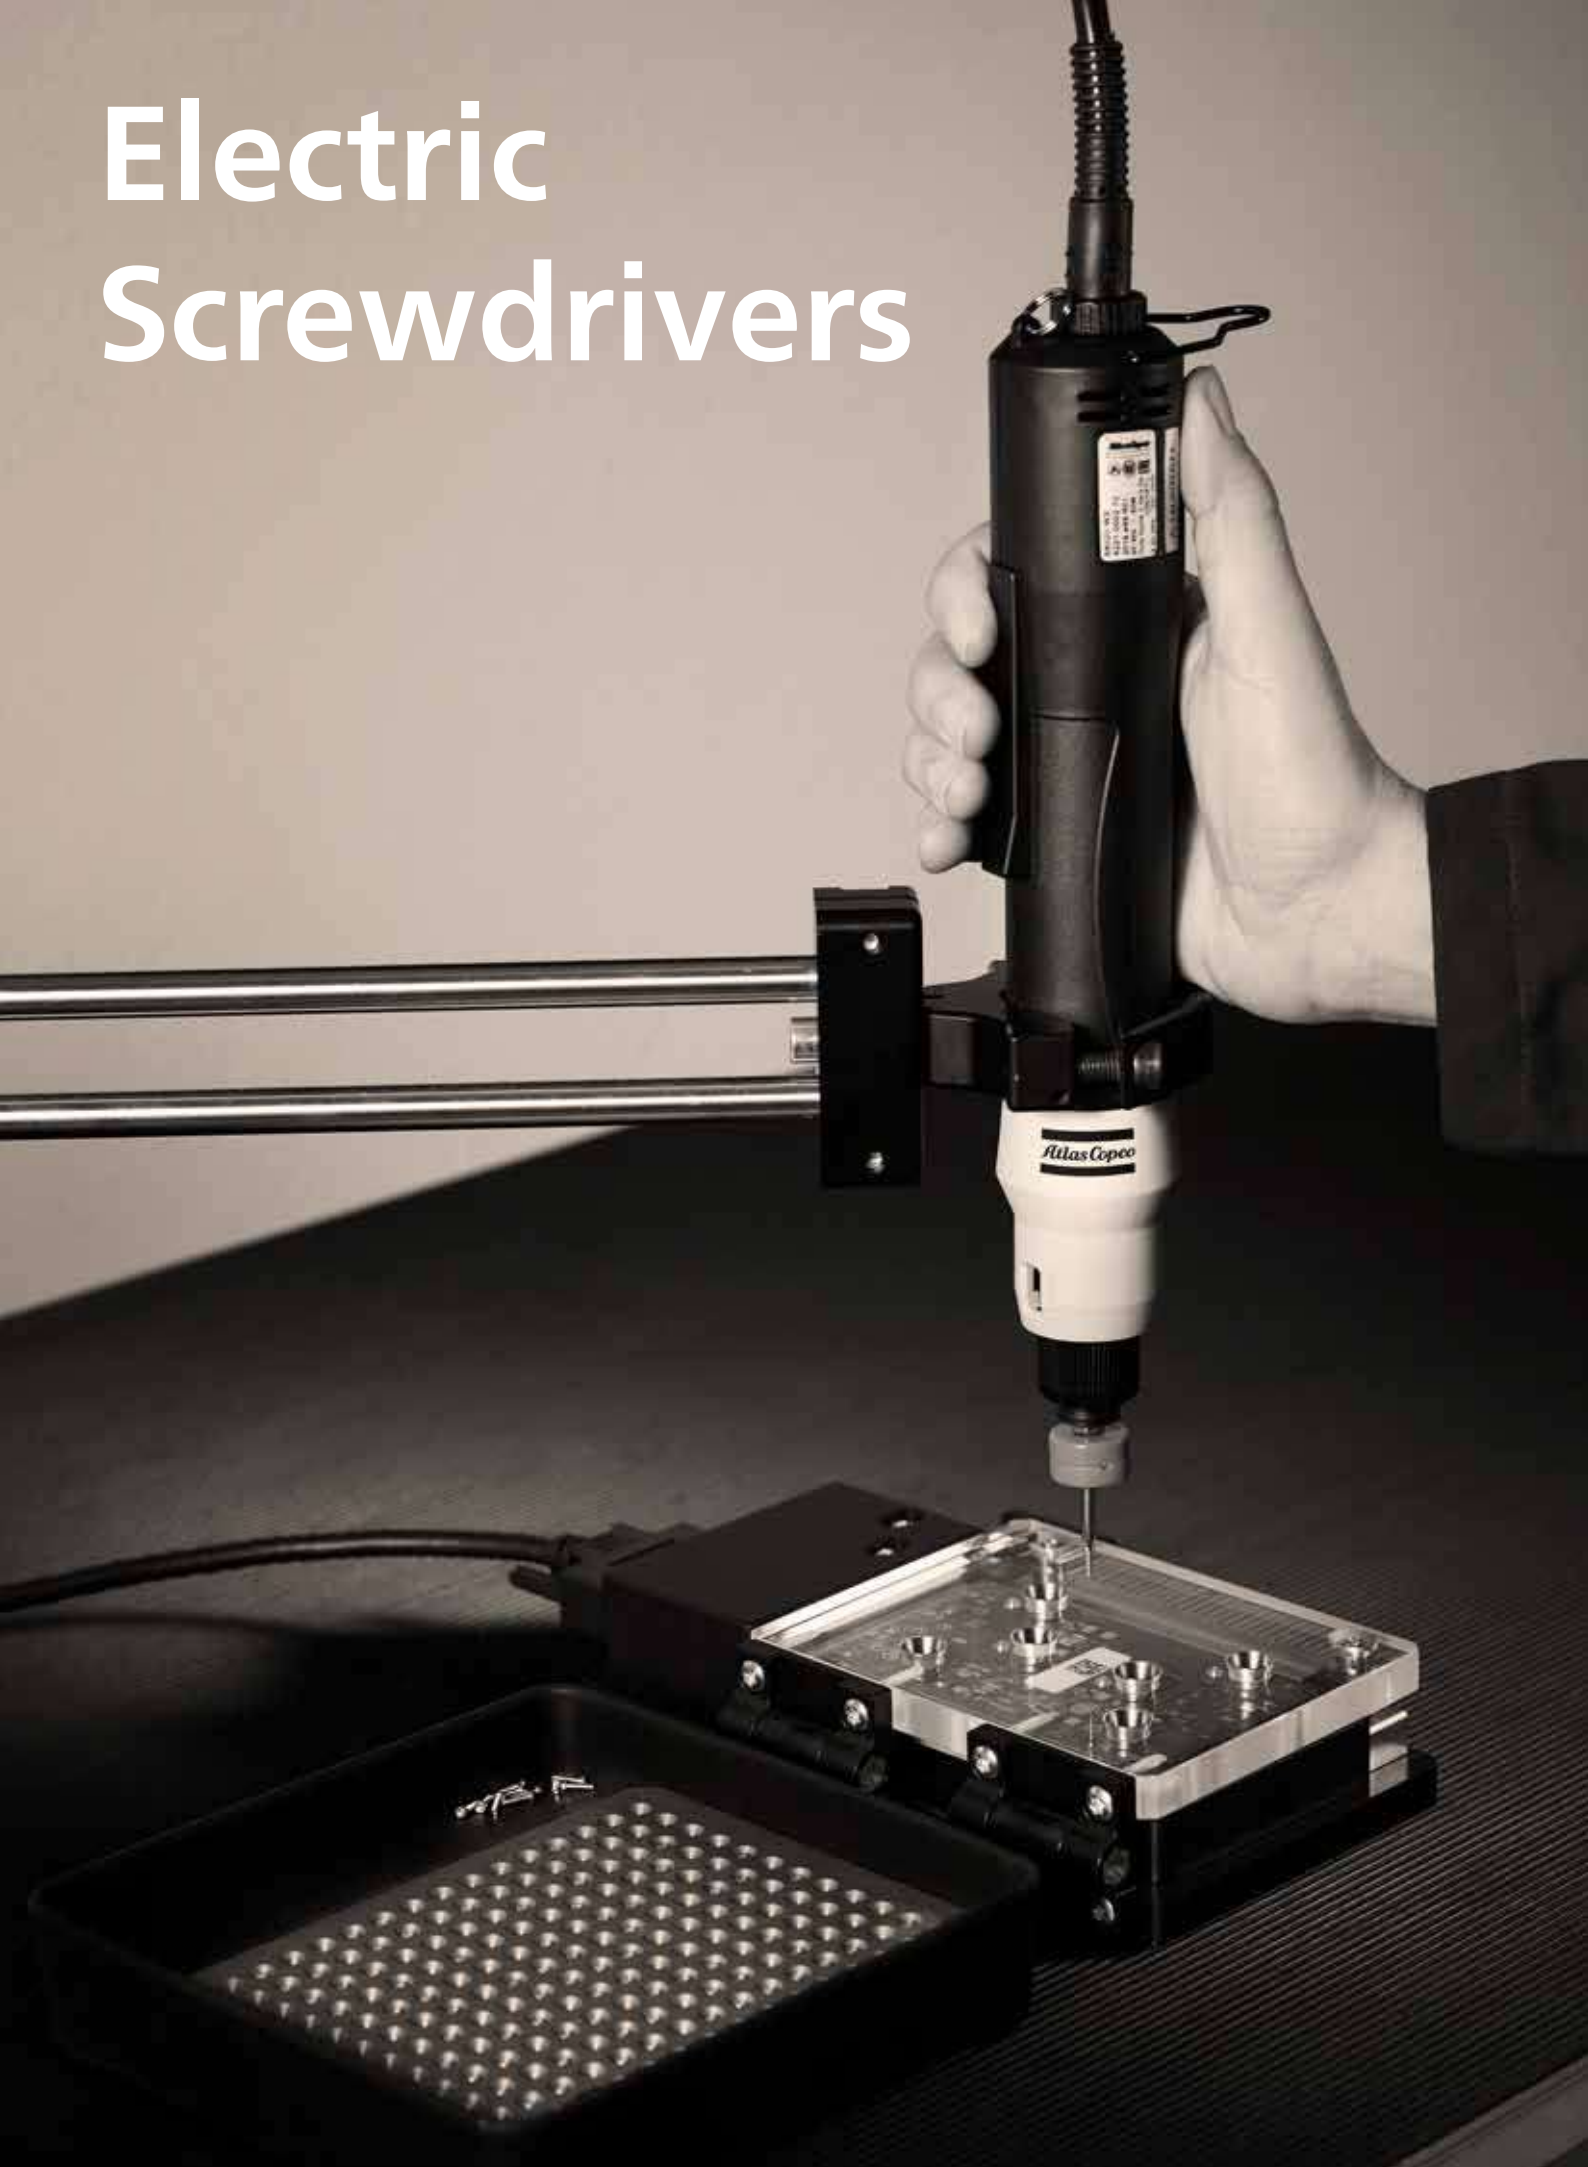

# Electric screwdrivers

## Handheld

The **S8 series offers** a wide variety of screwdrivers that give great speed and high precision.

Built with an ergonomic design, the low torque screwdriver S8 offers a plug & play solution for your assembly needs. The S8 series is designed to deliver great quality and increase efficiency.

- **Industrial design:** Ergonomic design for easy operator handling
- **High durability:** Build to last
- **Brushless motor:** Providing long service intervals
- **Plug & play:** Simple start-up process
- **Controllers and tools are ordered separately**



Model	Bit drive	Torque range min - max [ft lb]	Torque range min - max [cNm]	Free speed r/min	Weight kg	Weight lbs	Ordering No.
S8020	1/4" Hex	0.26-1.7	3-20	700-1000	0.46	1.01	4221 0002 73
S8020-WS	Wing shank 4 mm	0.26-1.7	3-20	700-1000	0.46	1.01	4221 0002 72
S8050	1/4" Hex	0.43-4.3	5-50	700-1000	0.46	1.01	4221 0002 74
S8120	1/4" Hex	1.3-10.4	15-120	700-1000	0.46	1.01	4221 0002 75
S8120-2000	1/4" Hex	1.3-10.4	15-120	1400-2000	0.46	1.01	4221 0002 76
S8160	1/4" Hex	1.7-13.9	20-160	700-1000	0.46	1.01	4221 0002 77
S8200	1/4" Hex	3.5-17.4	40-200	700-1000	0.46	1.01	4221 0002 78
S8250	1/4" Hex	4.3-21.7	50-250	500-750	0.46	1.01	4221 0002 79
<b>Power supply</b>							
EBS D					0.38	0.84	4221 0002 80

NOTE. Power Supply needs to be ordered separately