

LT30


LIFTING TABLE 300 kg



The scissor lift tables with foot-operated hydraulic pump are the ideal tools for a variety of lifting and loading operations and for use as “work station” to provide improved ergonomic conditions together with improved productivity. It represents the best solution for the manual load handling, combining functioning, cost saving, safety and health of operator during work.

COMPACTNESS

- The table is equipped with a folding handlebar that, when fully closed, becomes very compact and can be stored in a convenient, space saving way.
- Sturdy steel machine designed to transport and pick your goods becoming your reliable partner in the everyday work.
- Easy handling granted by ergonomic handle and the combination of fixed and steering polyurethane wheels.

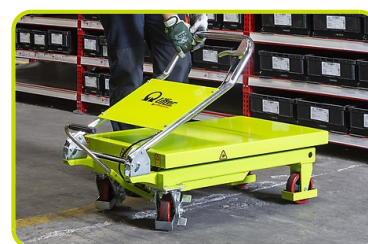

EASY OF USE

- Thanks to the efficient hydraulic foot pump the table can be brought to the desired height to easily pick or raise working materials.
- With the lever on the handle it is possible to lower the table without clicks with the utmost precision.



SAFETY

- The foot brakes on the steering wheels guarantee perfect stability during operations.
- The practical wheel guards on the steering wheels protect the feet while working.
- The objects raised at an individual and ergonomic height greatly reduce the strain on your back.
- The appropriate inspection supports fix the platform in case of maintenance or cleaning work.



APPLICATION FIELDS

Lift tables are perfect for order preparation and goods mobilization. They are commonly used throughout industry and commerce, including factories, warehouses, retail outlets, printers, schools, colleges, laboratories, banks and offices.



Description

| | | |
|----------------------|----|----------------|
| Load capacity | Kg | 300 |
| Material | | Steel |
| Scissor type | | Single scissor |
| Push handle type | | Folding |
| Weight | kg | 74 |
| Handle height | mm | 1010 |
| Pumping time no load | n. | 36 |
| Pumping time loaded | n. | 47 |

Lift

| | | |
|------------------|----|------------|
| Min. height | mm | 280 |
| Max. height | mm | 900 |
| Lifting distance | mm | 620 |
| Lift function | | Foot pedal |

Table size

| | | |
|--------|----|-----|
| Height | mm | 50 |
| Width | mm | 500 |
| Depth | mm | 815 |

Wheels

| | | |
|-------------------------|----|--------------|
| Wheels material | | Polyurethane |
| Wheels locking function | | Yes |
| Fixed wheels | n. | 2 |
| Swivel wheels | n. | 2 |
| Diameter of the wheels | mm | 125 |

The information is aligned with the Data file at the time of download. Printed on 04/10/2023 (ID 10320)

©2023 | PR Industrial S.r.l unipersonale – Loc. Il Piano – 53031 Casole d'Elsa (SI) – ITALY. Company subject to the management and coordination of Generac Power Systems Inc. | All rights reserved | Image shown may not reflect actual package. Specifications subject to change without notice

